




# LINK & LOCK SOFFIT

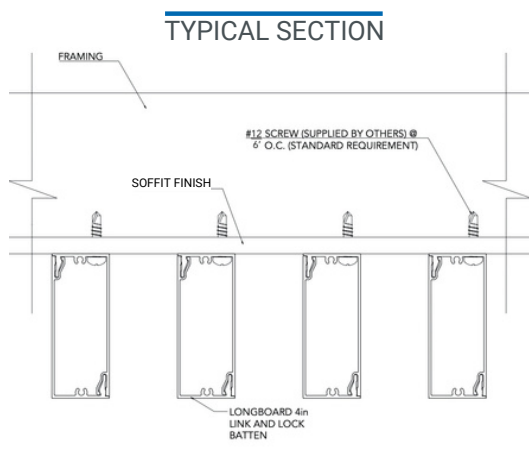

## PROFILES

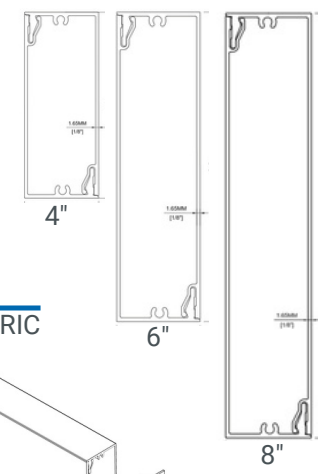

## TYPICAL ISOMETRIC

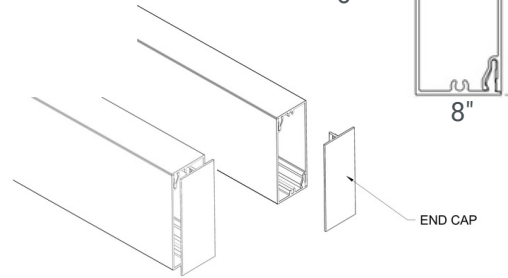

### PROFILES

1-5/8" X 4", 1-5/8" X 6", 1-5/8" X 8"  
Standard Lengths: 24'

### COMPONENTS

End Caps

### LEAD TIME

3-4 weeks (subject to change)

### PHYSICAL DATA

6063-T5 Extruded Aluminum  
100% Recyclable  
Warranty: Finish: 15 year (standard)/20 year\* (ultra) (\*10 week lead time); Aluminum: 50 year  
Weight - lbs/lf: 1.3 (4"); 1.5 (6"); 1.9 (8")

### TESTING

ICC-ES Evaluation Report - Division: 05 00 00 - METALS  
• Section: 05 50 00 - Metal Fabrications  
CAN/ULC S102  
CAN/ULC S114

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Product Code: FL20075

WUI (The Wildland-Urban Interface) - California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84

Acoustical Rating with insulation: NRC up to 0.80

Light reflectance (LRV): Up to 73.2% (Ultra White)

### FINISHES

Woodgrains, Solid, Specialty  
Custom Solid Colour Matching (Additional Lead Times Apply)

### ATTACHMENT

hard fasten w. #12 screws\* @ 6' o.c.  
\*screws are NOT included  
△ see install guide for details

### BIM & CAD

RVT & DWG files available, see website for details