


PANELBOARD




TYPICAL ISOMETRIC

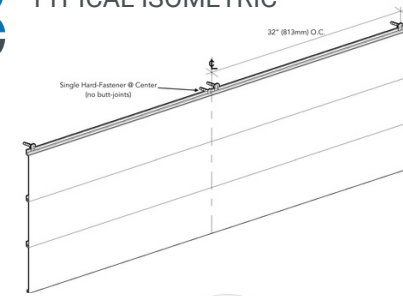

TYPICAL SECTION



6" SMOOTH PLANK

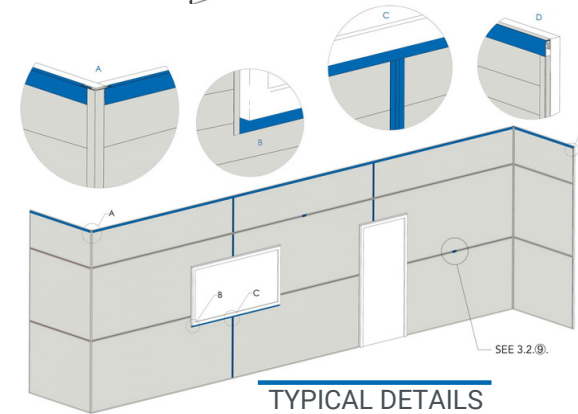

TYPICAL DETAILS



JUL 2021

PROFILE
6" Smooth Plank
Standard Length: 24', 96 SQ FT/box

12' COMPONENTS

- PERIMETER TRIMS:
 - 5/8" Starter J-Track, 5/8" J-Track, 1-3/8" Two Piece J-Track, 5/8" Two Piece J-Track, 1" Outside Corner, 3/4" Inside Corner, 2" Corner Set, 1-3/8" Termination Set, 5/8" Termination Set
- FIELD TRIMS:
 - 1-1/2" U-Reveal Set, 3/4" u-Reveal Set

24' COMPONENTS

- FIELD TRIMS:
 - 1-1/2" T&G U-REVEAL W. END SLEEVE, 3/4" T&G U-REVEAL W. END SLEEVE, COMPRESSION JOINT

FINISHES
Woodgrains, Solid, Specialty
Custom Solid Colour Matching (Additional Lead Times Apply)

ATTACHMENT
Planks: Quick-Screen Clips w. #8 screws* @ 32" o.c. (standard)
Quick-Screen Clips included: 90 pcs/box
Trims: hard fasten w. #8 screws* @ 24" o.c.
*screws are NOT included

BIM & CAD
RVT & DWG files available, see website for details

LEAD TIME
3-4 weeks (subject to change)

PHYSICAL DATA

6063-T5 Extruded Aluminum
100% Recyclable
Warranty: Finish: 15 year (standard)/20 year* (ultra) (*10 week lead time); Aluminum: 50 year
Weight: approx. 1.5lbs/sq. ft.

TESTING

ICC-ES Evaluation Report - Division: 07 00 00 Thermal and Moisture Protection Section: 07 46 00 - Siding

AAMA 509 Rainscreen: W1, V2

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Product Code: FL20075

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84 ; A2-s1,d0 by EN 13501-1

Light Reflectance: 5% (Black) up to 73.2% (Ultra White)

Wind load: Up to 100 psf (4788 Pa)

info@facadespec.com

facadespec.com

1(866)716-2436