


PRIVACY BEAMS SIDING



TYPICAL SECTIONS


FLOATING SYSTEM

MOUNTING BRACKET FLAT BAR SPACER






END-FRAME SYSTEM

SPACER BLOCK



TYPICAL ISOMETRICS

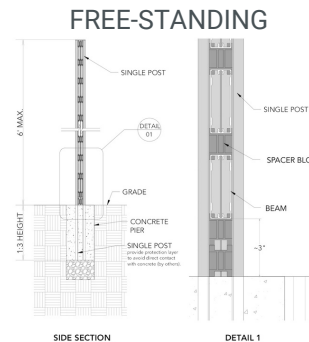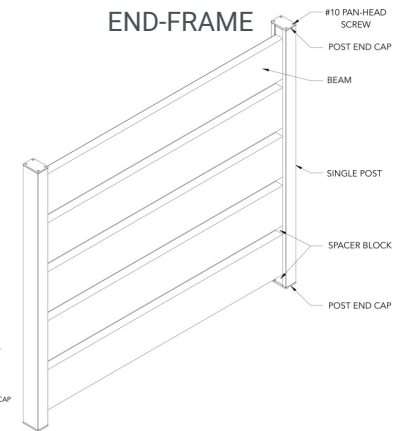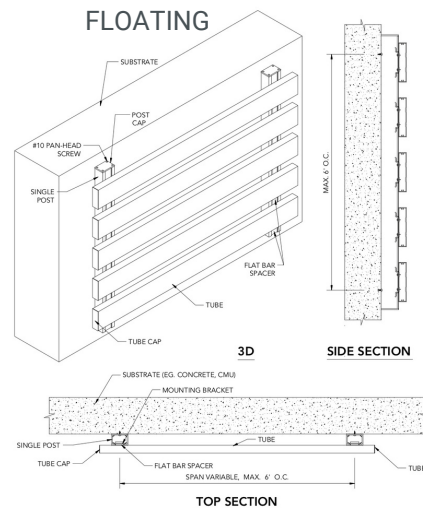

PHYSICAL DATA

6063-T5 Extruded Aluminum

100% Recyclable

Warranty: Finish:15 year (standard)/20 year* (ultra) (*10 week lead time); Aluminum: 50 year

Weight (lbs/lf): 0.7 (1x3); 1.1 (1x5)

TESTING

ICC-ES Evaluation Report - Division: 05 00 00 - Metals
Section: 05 50 00 - Metal Fabrications

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Building Code - Building
Florida Building Code - Residential

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84

PROFILES

1x3, 1x5 - standard lengths: 24'

COMPONENTS

Single Post, Double Post - standard lengths: 24'

Beam End Cap, Post End Cap - units (20pcs)

Flat Bar Spacer (1"), Flat Bar (12'), Mounting Bracket - units (100pcs)

Spacer Block - units (100pcs)

FINISHES

Woodgrains, Solid, Specialty

Custom Solid Colour Matching (Additional Lead Times Apply)

☀ Light Reflectance: 5% (Black) up to 73.2% (Ultra White)

info@facadespec.com

facadespec.com

1 (866) 716-2436