

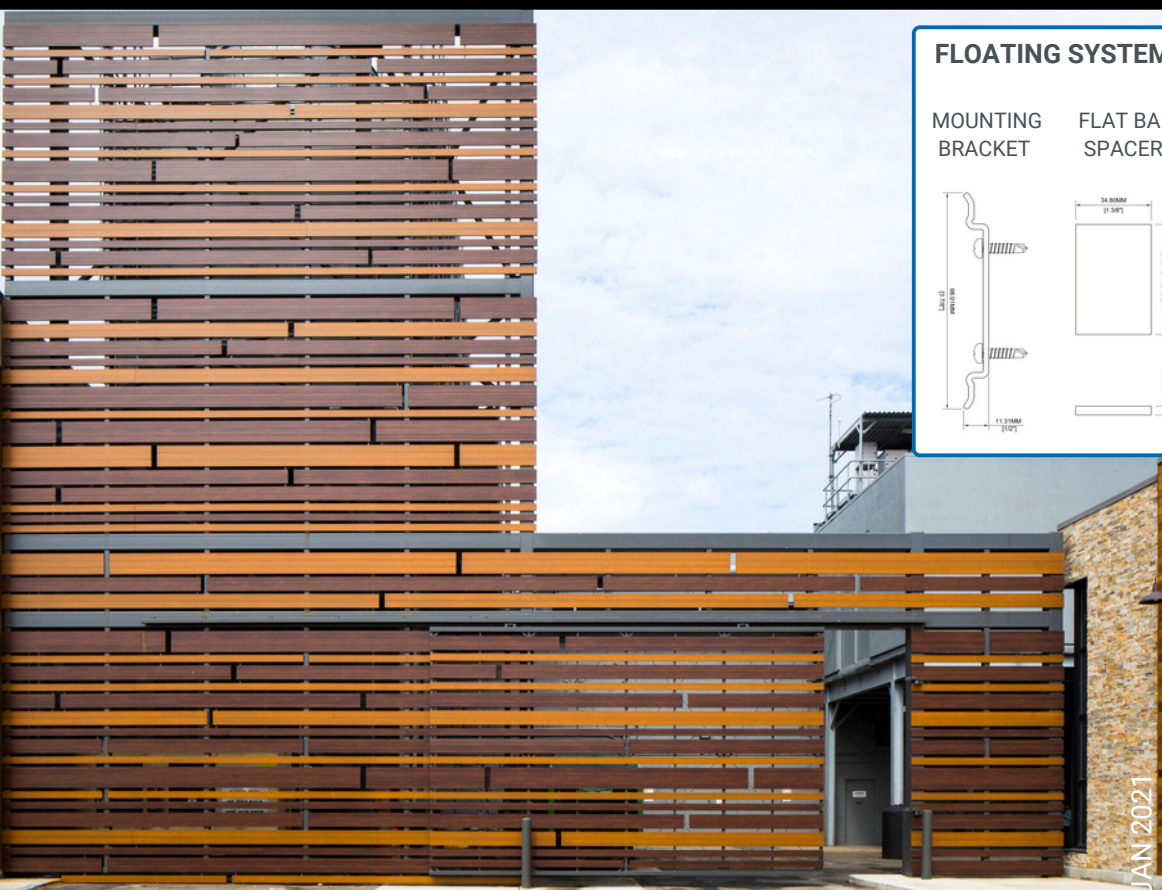



PRIVACY BEAMS PRIVACY SCREEN

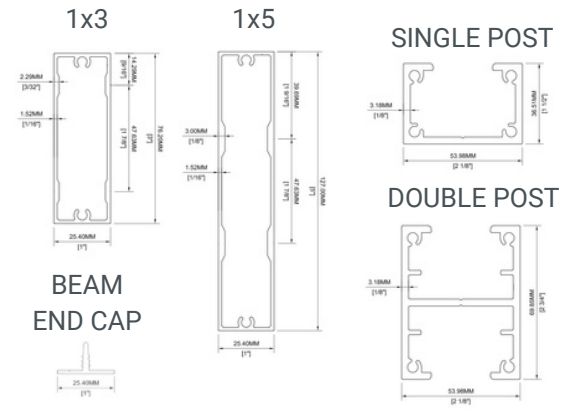

TYPICAL SECTIONS

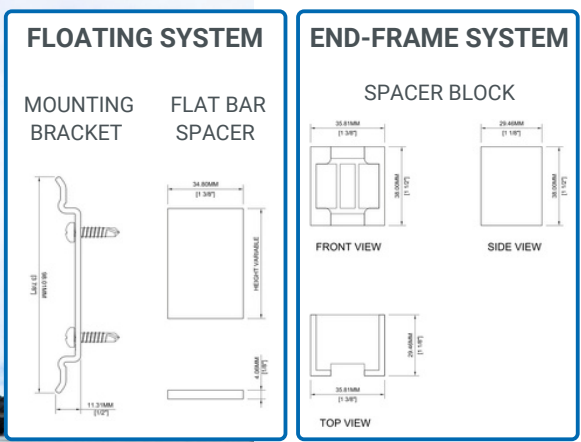

TYPICAL ISOMETRICS

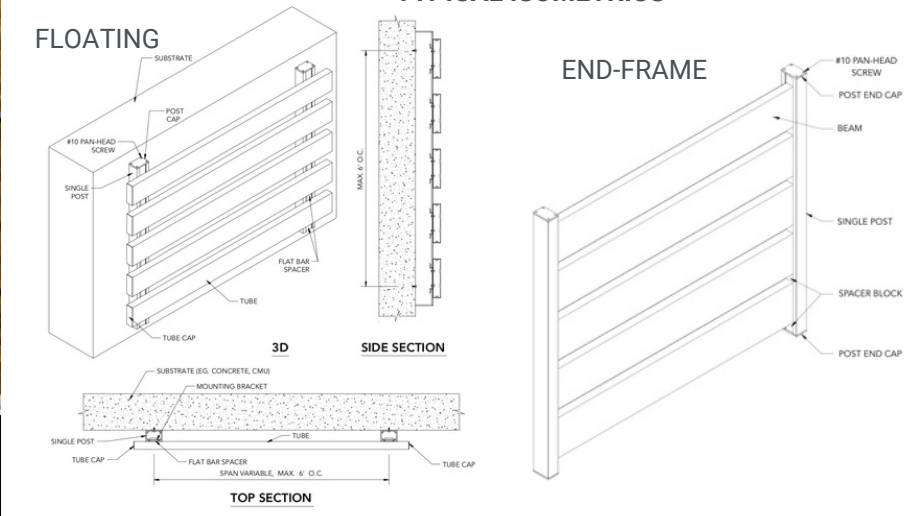

PHYSICAL DATA
 6063-T5 Extruded Aluminum
 100% Recyclable
 Warranty: Finish: 15 year (standard)/20 year* (ultra) (*10 week lead time); Aluminum: 50 year
 Weight - lbs/lf: 0.7 (1x3) ; 1.1 (1x5)

TESTING
 ICC-ES Evaluation Report - Division: 05 00 00 - Metals
 Section: 05 50 00 - Metal Fabrications

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

Florida Building Code - Building
 Florida Building Code - Residential

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500

PROFILES
 1x3, 1x5 - standard lengths: 24'

COMPONENTS
 Single Post, Double Post - standard lengths: 24'
 Beam End Cap, Post End Cap - units (20pcs)
 Flat Bar Spacer (1"), Flat Bar (12'), Mounting Bracket - units (100pcs)
 Spacer Block - units (100pcs)

FINISHES
 Woodgrains, Solid, Specialty
 Custom Solid Colour Matching (Additional Lead Times Apply)
 ☀️ Light Reflectance: 5% (Black) up to 73.2% (Ultra White)

ATTACHMENT
 Floating System, End-Frame System

BIM & CAD
 RVT & DWG files available,
 see website for details

LEAD TIME
 3-4 weeks (subject to change)

Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84